

烜

# GXUAN 1919

## 36V/26W V3 series



### Introduction

Everlight's COB Series is an aluminum substrate based LED achieving high efficiency while maintaining high CRI at Energy Star / ANSI color temperature ranges.

### Features

- ◆ High Power COB & High CRI LED
- ◆ Multi-Chip Solution
- ◆ Dimension:19.0mm x19.0mm x 1.6 mm
- ◆ Main Parameters: Luminous Flux, Forward Voltage , Chromaticity and Color Rendering Index
- ◆ RoHS compliant
- ◆ Energy Star / ANSI Compliant Binning Structure
- ◆ Typical Viewing Angle: 115°

### Applications

- ◆ Replacement Bulb
- ◆ Indoor General Lighting
- ◆ Recessed Can Lighting

## Table of Contents

Product Nomenclature .....	3
Absolute Maximum Ratings .....	4
PN of the GXUAN 1919 36V/26W V3 series:White LEDs.....	5
Product Binning:Luminous Flux Bins .....	6
Prodcut Binning:Warm White Bin Structure .....	7
Product Binning:Warm White Bin Coordinates .....	7
Prodcut Binning:Neutral White Bin Structure.....	8
Product Binning:Neutral White Bin Coordinates.....	8
Prodcut Binning:Cool White Bin Structure .....	9
Product Binning:Cool White Bin Coordinates .....	9
Product Binning:Forward Voltage Bins .....	10
Mechanical Dimension.....	11
Pad Configuration .....	12
Typical Electro-Optical Characteristic Curve .....	13
Product Labeling .....	18
Carrier Tray Specification .....	18
Precautions of Use .....	19
Revision History .....	22

---

## Product Nomenclature

The product name is designated as below:

# GXUAN1919-CDEFGHJ-KLMNP-QRST

Family name  
GXUAN1919

Designation:

CD = lighting color and wavelength<sup>[1]</sup>

EF = color bin or CCT bin

G = internal code

HJ = min. luminous flux (lm) or radiation power (mW) performance

KL = forward voltage bin<sup>[2]</sup>

M = internal code

NP = power consumption<sup>[3]</sup>

Q= internal code

R= Dam Diameter<sup>[4]</sup>

S= internal code

T=Type of Package<sup>[5]</sup>

### Notes

#### 1. Table of lighting color and wavelength

Symbol	Color	CCT range	Color Rendering Index
GT	Cool-White	4745~7050K	>65
KT	Cool-White	4745~7050K	>80
PT	Cool-White	4745~7050K	>90
LM	Warm-White	2580~3710K	>70
	Neutral-White	3710~4745K	
KM	Warm White	2580~3710K	>80
	Neutral-White	3710~4745K	
PM	Warm-White	2580~3710K	>90
	Neutral-White	3710~4745K	

#### 2. Table of forward voltage bin

Symbol	Description
36	36V Input Voltage

#### 3. Power consumption:

Symbol	Description
25	25W

#### 4. Dam Diameter:


Symbol	Description
E	14.0-14.9mm

#### 5. Table of packaging types:

Symbol	Description
T	Tray

## Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Max. DC Forward Current (mA)	$I_F$	1440	mA
Max. Pulse Forward Current (mA)	$I_P$	1600	mA
Power Dissipation	$P_d$	57	W
Thermal Resistance	$R_{th}$	0.3	°C/W
Max. Junction Temperature	$T_J$	125	°C
Operating Temperature <sub>[4],[5]</sub>	$T_{Opr}$	-40 ~ +85	°C
Storage Temperature	$T_{Stg}$	-40 ~ +85	°C

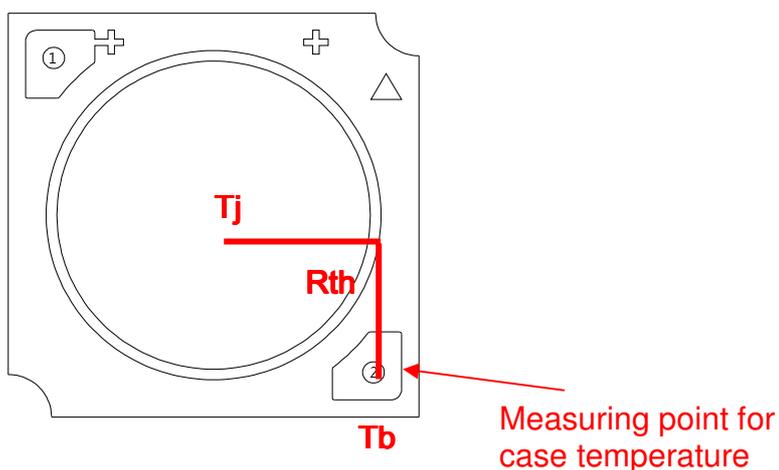

### Notes:

1. For optimal performance, Everlight recommends 450mA operation.
2.  $t_p \leq 100ms$ , Duty cycle = 25%
3. The XUAN1919 36V/25W V3 series LEDs are not designed for reverse bias use.
4. Power dissipation and forward current are the value when the module temperature is set lower than the rating by using an adequate heat sink.

**PN of the GXUAN1919 Series : White LEDs**




Order Code of GXUAN1919	Minimum Luminous Flux (lm) @Tb=85°C	Typical Luminous Flux (lm) @Tb=85°C	Typical Luminous Flux (lm) @Tb=25°C	CCT (K)	Forward Voltage (V)	Forward Current (mA)	CRI (min.)
XUAN1919-LM27327-36826-4E2T	2929	3255	3576	27M3	31.0~37.0	720	70
XUAN1919-LM30330-36826-4E2T	3105	3450	3791	30M3	31.0~37.0	720	70
XUAN1919-LM35335-36826-4E2T	3201	3557	3908	35M3	31.0~37.0	720	70
XUAN1919-LM40340-36826-4E2T	3251	3612	3970	40M3	31.0~37.0	720	70
XUAN1919-GT50550-36826-4E2T	3360	3734	4103	50M5	31.0~37.0	720	70
XUAN1919-GT57557-36826-4E2T	3397	3774	4148	57M5	31.0~37.0	720	70
XUAN1919-GT65565-36826-4E2T	3397	3774	4148	65M5	31.0~37.0	720	70
GXUAN1919-KM27327-36826-4E2T	2763	3070	3411	27M3	31.0~37.0	720	80
GXUAN1919-KM30330-36826-4E2T	2929	3254	3616	30M3	31.0~37.0	720	80
GXUAN1919-KM35335-36826-4E2T	3020	3355	3728	35M3	31.0~37.0	720	80
GXUAN1919-KM40340-36826-4E2T	3067	3408	3786	40M3	31.0~37.0	720	80
GXUAN1919-KT50550-36826-4E2T	3170	3522	3913	50M5	31.0~37.0	720	80
GXUAN1919-KT57557-36826-4E2T	3205	3561	3956	57M5	31.0~37.0	720	80
GXUAN1919-KT65565-36826-4E2T	3205	3561	3956	65M5	31.0~37.0	720	80
GXUAN1919-PM27327-36826-4E2T	2416	2684	2982	27M3	31.0~37.0	720	90
GXUAN1919-PM30330-36826-4E2T	2585	2872	3191	30M3	31.0~37.0	720	90
GXUAN1919-PM35335-36826-4E2T	2619	2910	3233	35M3	31.0~37.0	720	90
GXUAN1919-PM40340-36826-4E2T	2687	2985	3317	40M3	31.0~37.0	720	90

**Notes:**

1. CRI measurement tolerance:  $\pm 2$ .
2. Luminous flux measurement tolerance:  $\pm 10\%$ .
3. The data of luminous flux measured at thermal pad=25°C
4. Typical luminous flux or light output performance is operated within the condition guided by this datasheet.

## Product Binning

### Warm-White Bin Structure

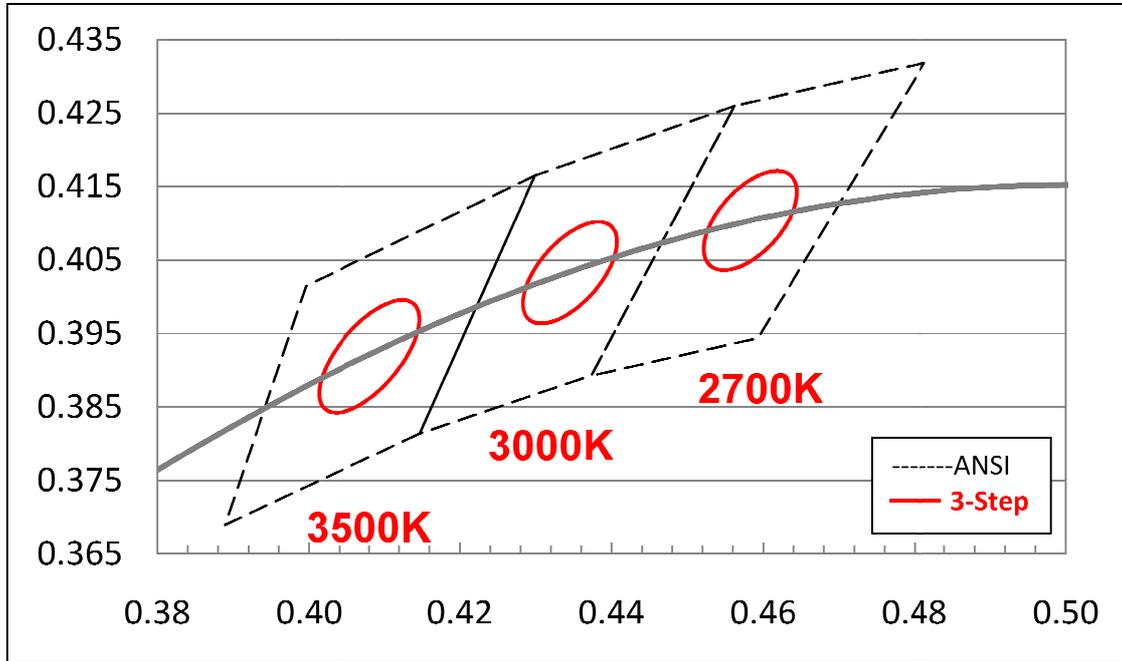

### Warm-White Bin Coordinates

#### 2700K

Bin	Center-CIE X	Center-CIE Y
27M3	0.4583	0.4101
	Oval parameter	
	a	0.0081
	b	0.0042
	theta	49.7

Bin	CIE X	CIE Y
ANSI	0.4813	0.4319
	0.4562	0.4260
	0.4373	0.3893
	0.4593	0.3944
Reference Range: 2580~2869K		

#### 3000K

Bin	Center-CIE X	Center-CIE Y
30M3	0.4345	0.4033
	Oval parameter	
	a	0.00834
	b	0.00408
	theta	50.22


Bin	CIE X	CIE Y
ANSI	0.4562	0.4260
	0.4299	0.4165
	0.4147	0.3814
	0.4373	0.3893
Reference Range: 2858~3209K		

#### 3500K

Bin	Center-CIE X	Center-CIE Y
35M3	0.4080	0.3919
	Oval parameter	
	a	0.00927
	b	0.00414
	theta	51.00

Bin	CIE X	CIE Y
ANSI	0.4299	0.4165
	0.3996	0.4015
	0.3889	0.3690
	0.4147	0.3814
Reference Range: 3209~3710K		

Neutral-White Bin Structure

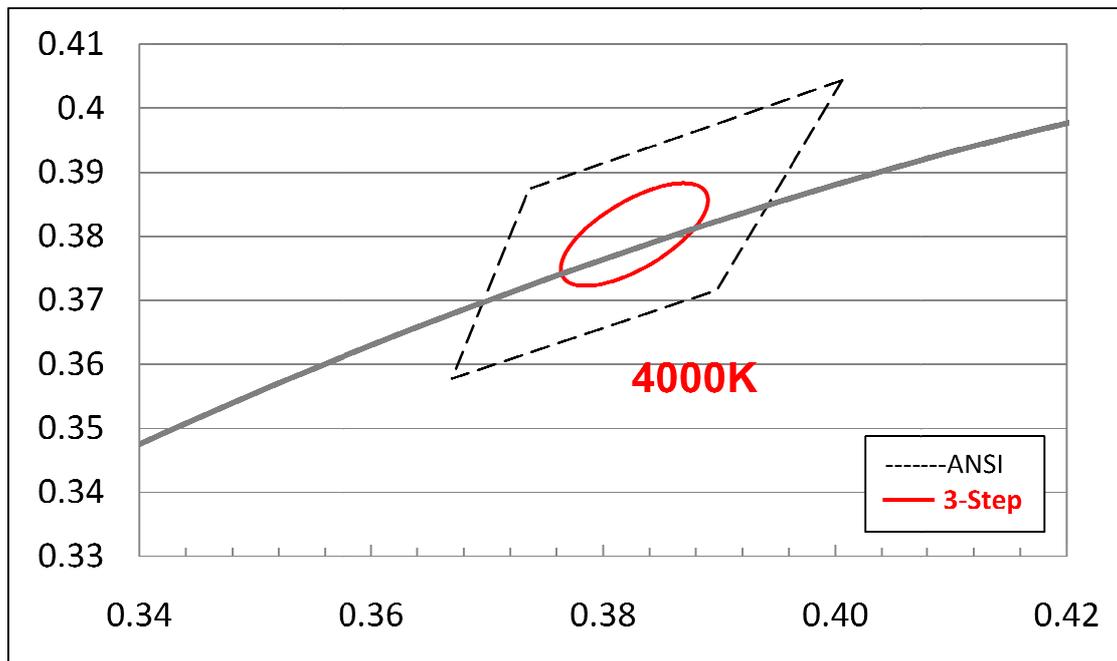


Neutral-White Bin Coordinates

4000K

Bin	Center-CIE X	Center-CIE Y
40M3	0.3827	0.3803
	Oval parameter	
	a	0.00939
	b	0.00402
	theta	54.80

Bin	CIE X	CIE Y
ANSI	0.4006	0.4044
	0.3736	0.3874
	0.3670	0.3578
	0.3898	0.3716
Reference Range: 3709~4260K		

Cool-White Bin Structure

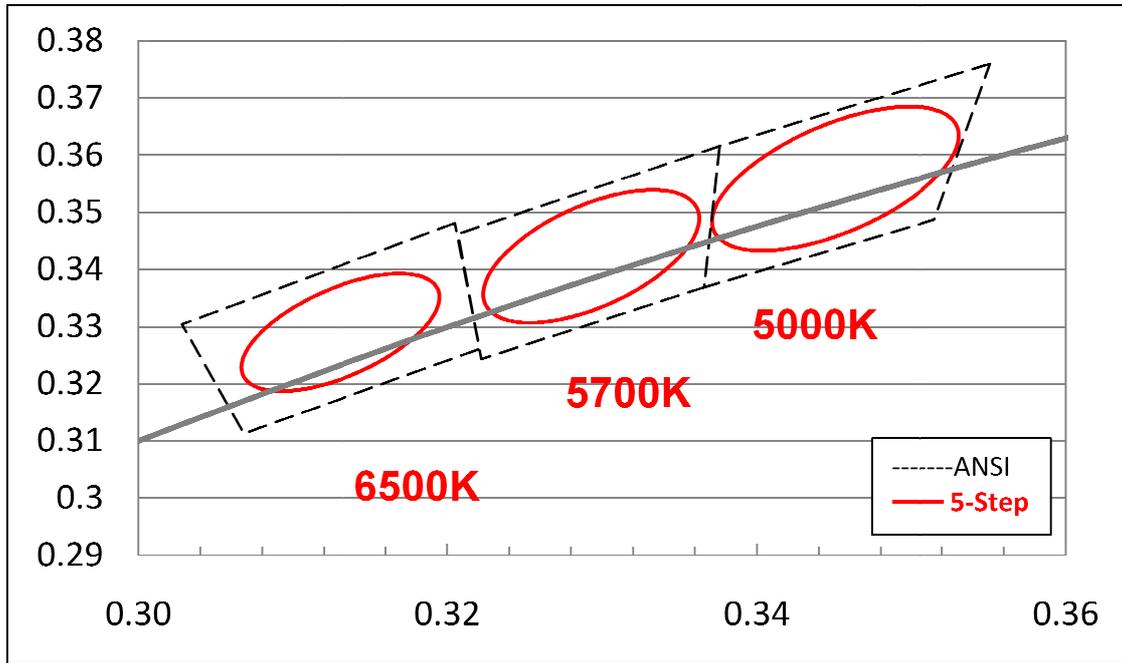

Cool-White Bin Coordinates

5000K

Bin	Center-CIE X	Center-CIE Y
50M5	0.3451	0.3559
	Oval parameter	
	a	0.01370
	b	0.00590
	theta	64.12

Bin	CIE X	CIE Y
ANSI	0.3551	0.3760
	0.3376	0.3616
	0.3366	0.3369
	0.3515	0.3487
Reference Range: 4744~5310K		

5700K

Bin	Center-CIE X	Center-CIE Y
57M5	0.3293	0.3423
	Oval parameter	
	a	0.01245
	b	0.00535
	theta	66.51

Bin	CIE X	CIE Y
ANSI	0.3376	0.3616
	0.3207	0.3462
	0.3222	0.3243
	0.3366	0.3369
Reference Range: 5308~6020K		

6500K

Bin	Center-CIE X	Center-CIE Y
65M5	0.3131	0.3290
	Oval parameter	
	a	0.01115
	b	0.00475
	theta	64.57

Bin	CIE X	CIE Y
ANSI	0.3205	0.3481
	0.3028	0.3304
	0.3068	0.3113
	0.3221	0.3261
Reference Range: 6020~7043K		

Notes:

1. Color coordinates measurement allowance :  $\pm 0.01$ .


### Forward Voltage Bins

Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
W4	31.0	37.0

**Notes:**

1. Forward voltage measurement tolerance:  $\pm 2\%$ .
2. Forward voltage bins are defined at  $I_f=720\text{mA}$  operation.
3. Other Forward Voltage bins for White LEDs available upon request. Please contact your local Everlight sales office.


### Mechanical Dimension

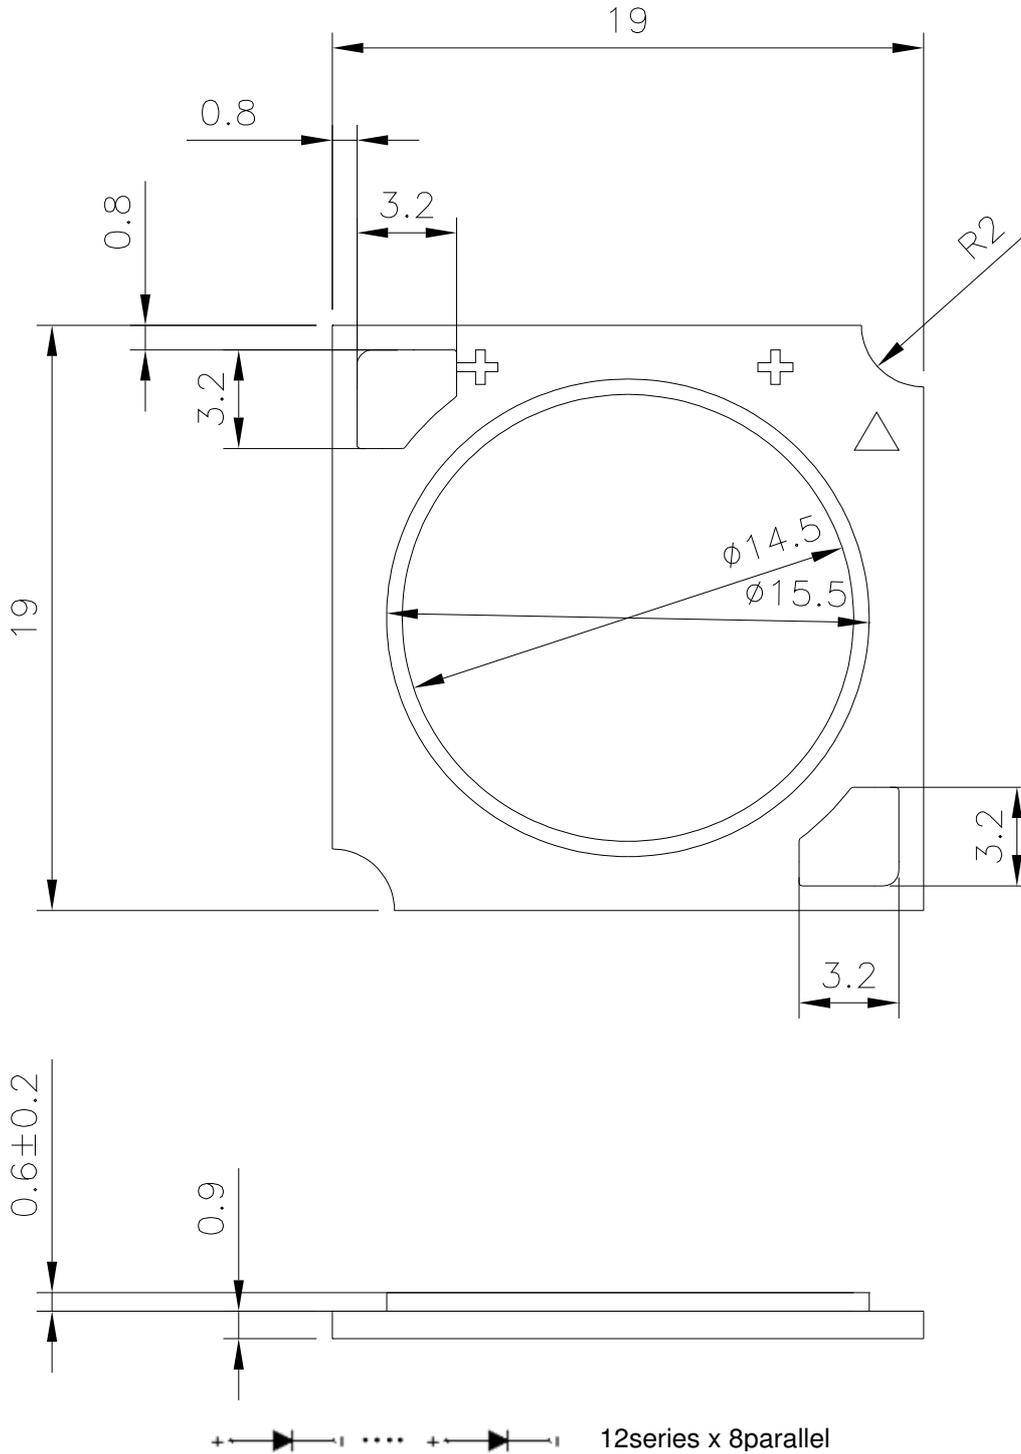

**Note:**

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are  $\pm 0.1$ mm.


## Pad Configuration

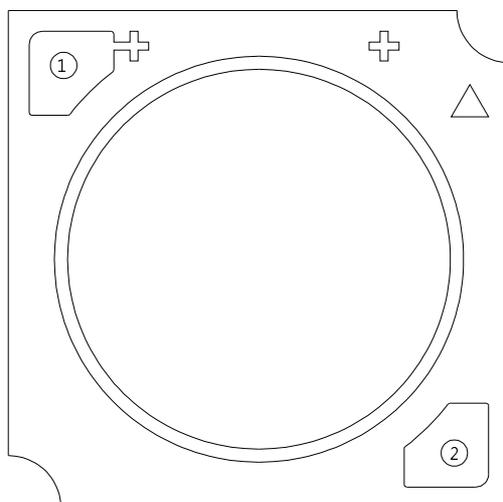


PAD	FUNCTION
1	ANODE
2	CATHODE

## Typical Electro-Optical Characteristic Curve


Relative Spectral Distribution  
@ Substrate Temperature = 25°C

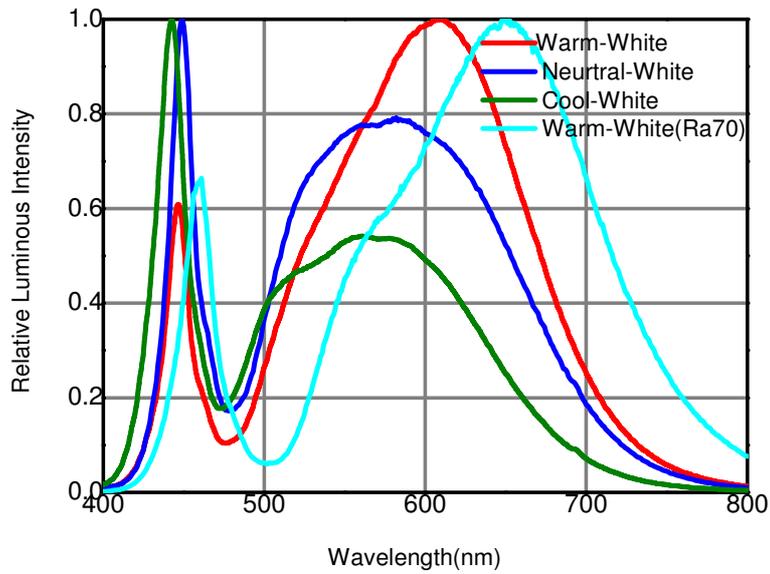


Relative Luminous Flux vs. Substrate Temperature  
@Forward Current = 720mA

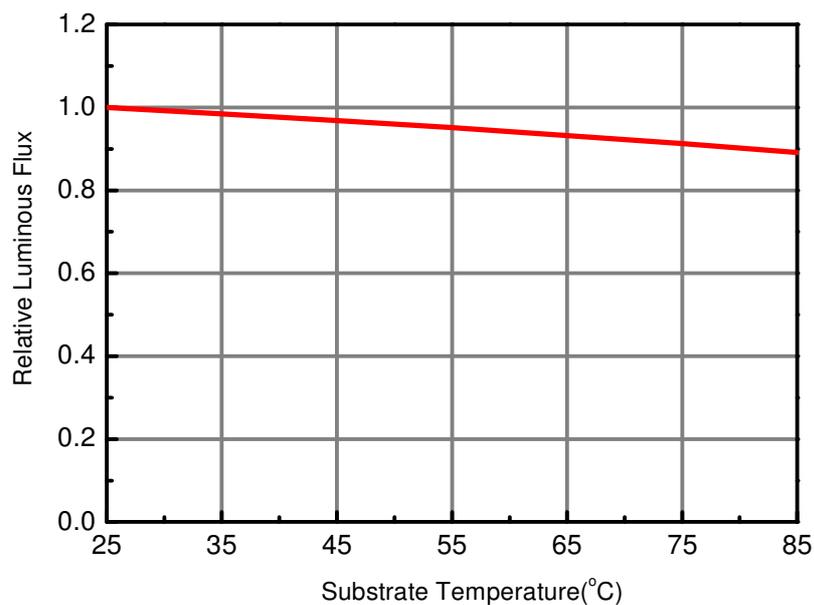


**Forward Voltage vs. Forward Current**  
**@ Substrate Temperature = 25°C**

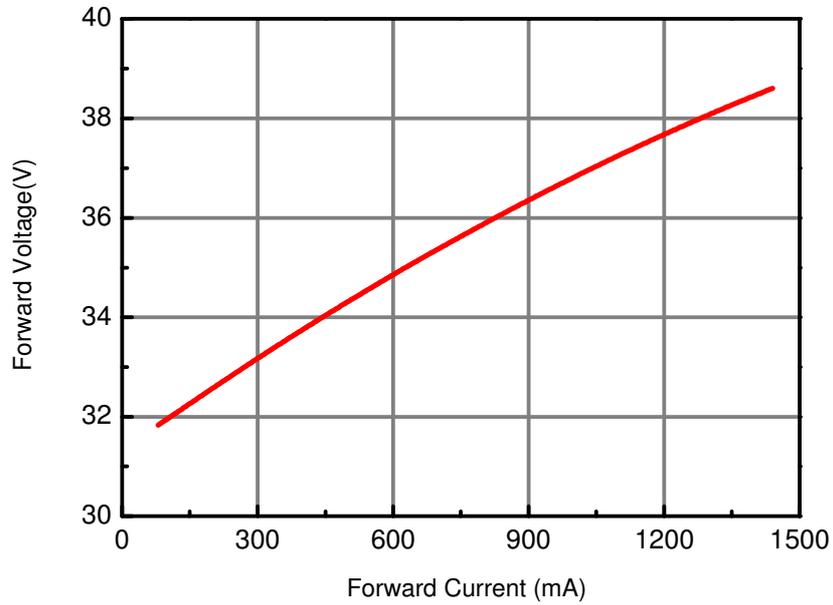


**Luminous Flux vs. Forward Current**  
**@ Substrate Temperature = 25°C**

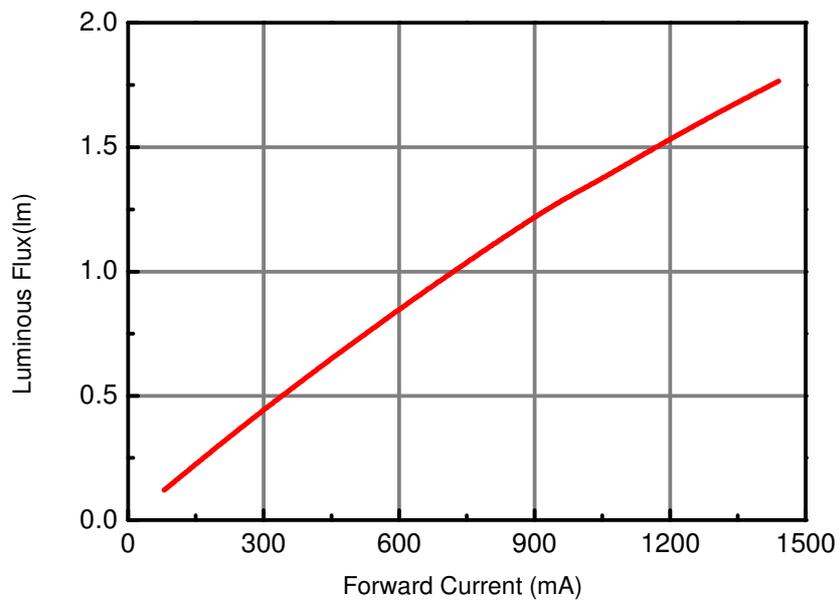


**Correlated Color Temperature vs. Forward Current**  
**@ Substrate Temperature = 25°C**

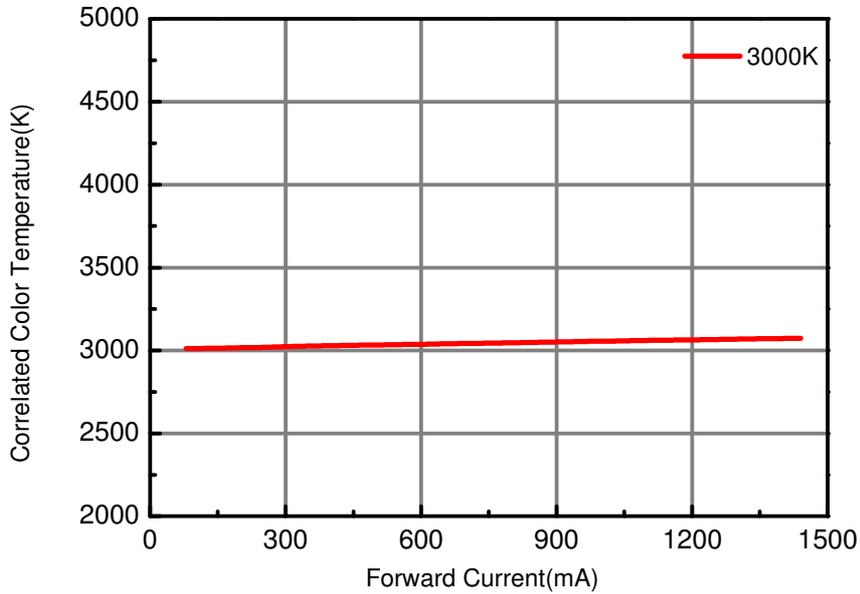


**Correlated Color Temperature vs. Substrate Temperature**  
**@ Forward Current = 720mA**

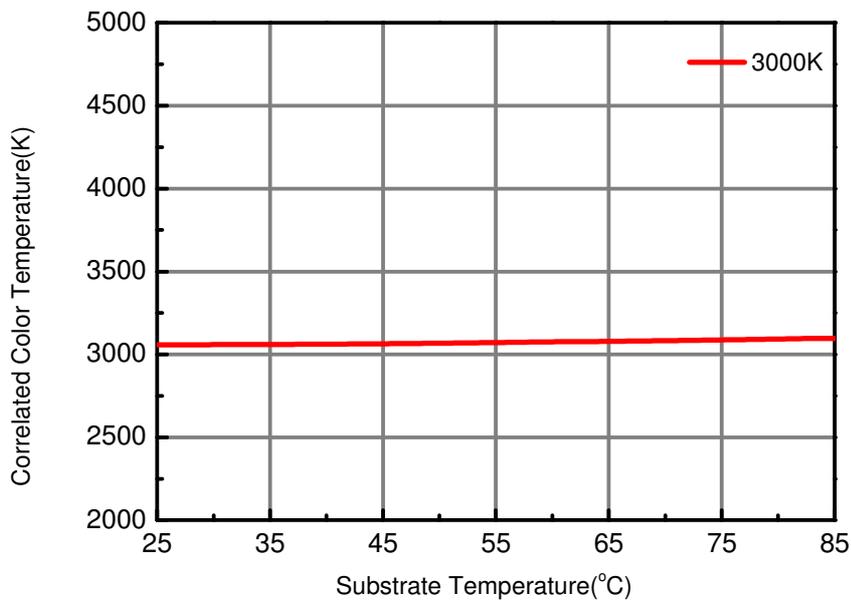


**Forward Voltage vs. Substrate Temperature**  
**@ Forward Current =720mA**

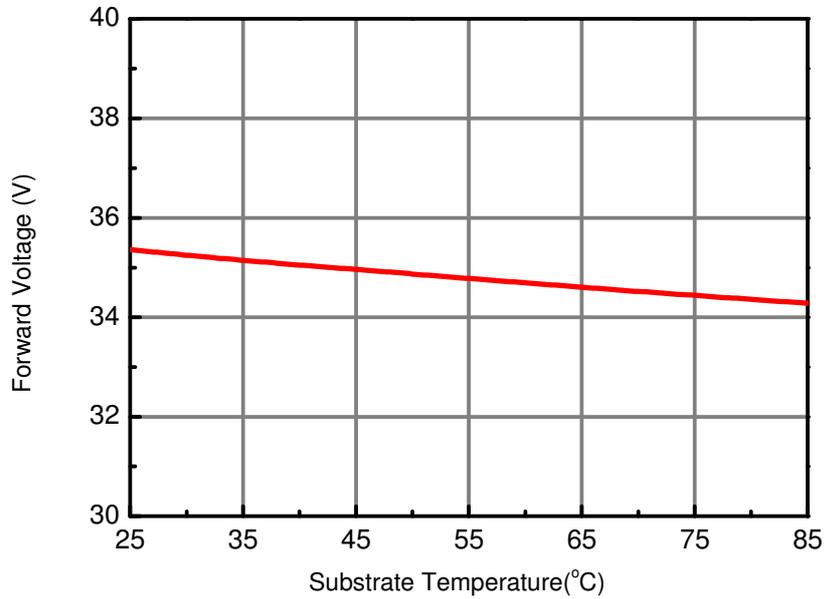

**Forward Current Derating Curve**  
**@ Junction Temperature <125°C**

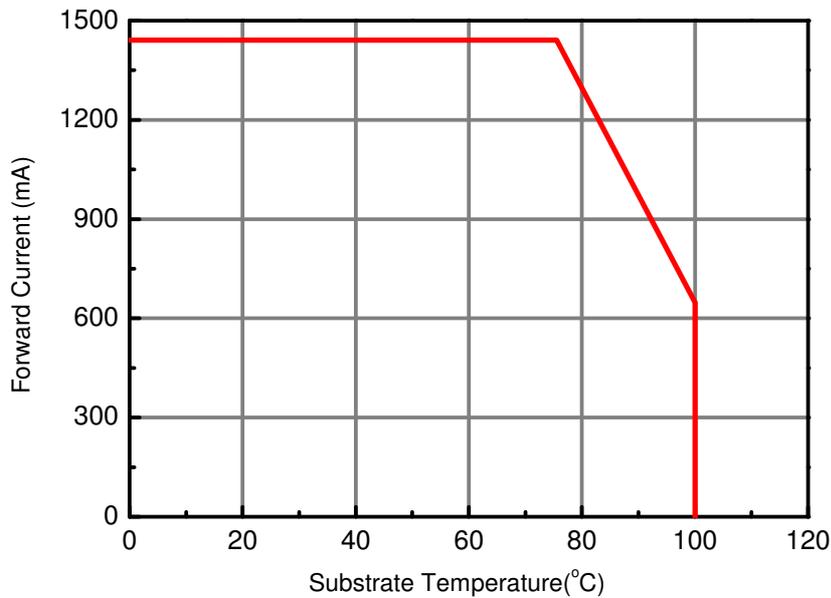

### Typical Diagram Characteristics of Radiation Patterns

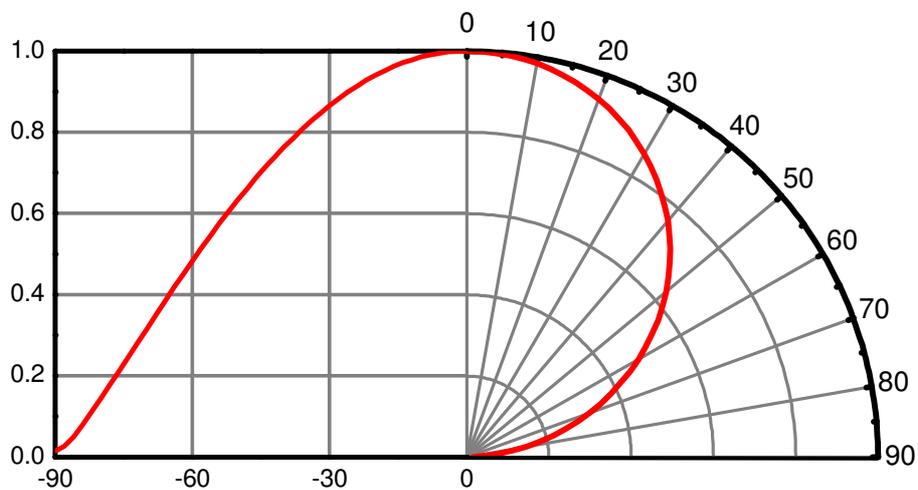

**Notes:**

1.  $2\theta_{1/2}$  is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. Viewing angle tolerance is  $\pm 5^\circ$

## Product Labeling

### Label Explanation

CPN: Customer Specification (when required)

P/N : Everlight Production Number

QTY: Packing Quantity

CAT: Luminous Flux (Brightness) Bin

HUE: Color Bin

REF: Forward Voltage Bin



LOT No: Lot Number

MADE IN TAIWAN: Production Place



## Carrier Tray Specification

Loaded Quantity: 63 PCS Per Tray

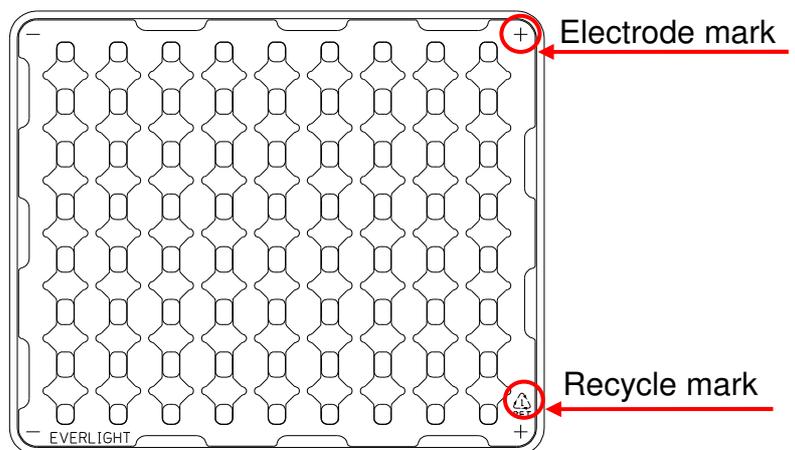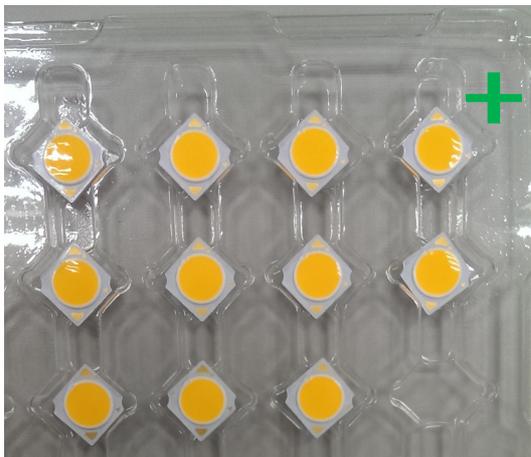


Notes:

1. Dimensions are in millimeters
2. Tolerances unless mentioned are  $\pm 0.1\text{mm}$


### LED Direction

- The **Recycle mark** on the LEDs will be toward the **Anode mark** on the carrier tray.

### Moisture Resistant Packaging

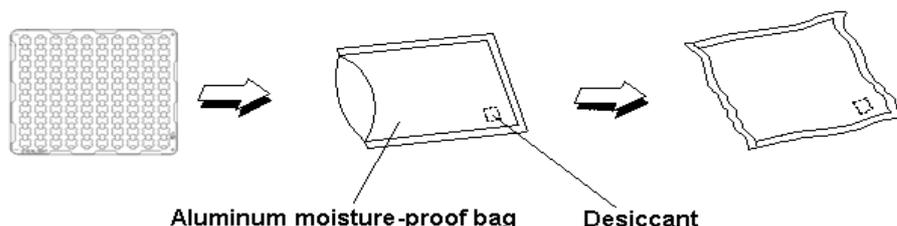

Outside Carton

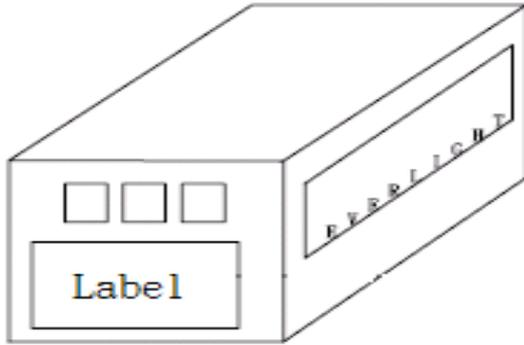

Packaging Quantity

- 63 PCS Per Tray
- 20 Trays Per Outside Carton

RoHS (Pb) EVERLIGHT 5

CPN: XXXXXXXXXXXXXXXXXXXX  
XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX  
P/N: XXXXXXXXXXXX  
XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX  
LOT NO: Y150716XXX-XXXXXXXXXX-XXXXXXXXXX  
QTY: 0123456789 HUE: XXXXXXXXXXXX  
CAT: XXXXXXXXXXXX REF: XXXXXXXXXXXX  
REFERENCE: BTPYMMDDXXXXX  
MADE IN XXXXXXXX




## Precautions of Use

### Over-Current-Proof

- Though the GXUAN1919 has a conducted ESD protection mechanism, customers must not use the device in reverse and should apply resistors for extra protection. Otherwise slight voltage shift may cause significant current changes and burn out failure may happen.

### Storage Conditions

- Before the package is opened: The LEDs should be stored at 30°C or less and 50%RH or less after being shipped from Everlight and the storage life limit is 6 months. If the LEDs are stored for 6 months or more, they should be stored in a sealed container with a nitrogen atmosphere and moisture absorbent material.
- After opening the package: The LED should be stored under 30°C or less and 30%RH or less. The LED should be used within 168hrs (7days) after opening the package. If unused LEDs remain, it should be stored in moisture proof packages.
- Do not stack assemblies.

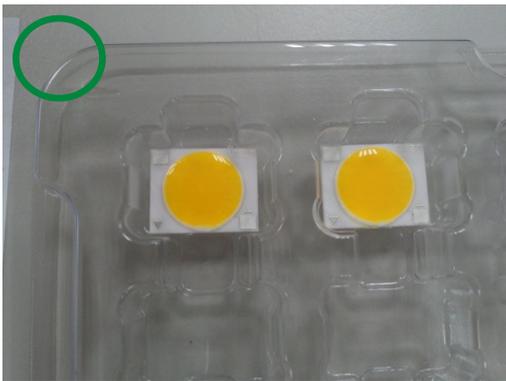


## Handling

- Do not put mechanical stress on the LED.
- Never touch the optical surface with finger or sharp object. The LED surface could be soiled or damaged, which could affect the optical performance of the LED.
- In low-humidity work environment, please keep handling the LEDs with appropriate ESD grounding.
- It is recommended to handle the LED with powder-less latex gloves.

## Manual Handling

- When handling the product, do not apply direct pressure on the optical surface.
- Do not touch the resin with tweezers to avoid scratching or other damage.

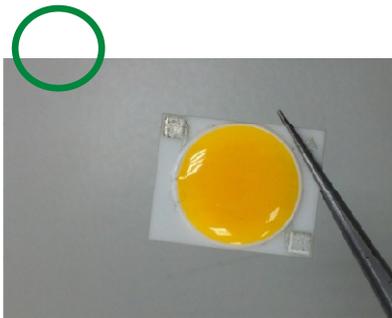

## Thermal Management

- Sufficient thermal management must be implemented. Substrate of the positive in temperature must be kept under 85°C at the driving current of 540mA. Otherwise, the junction temperature of die may exceed the limit at high current driving conditions and the LEDs' lifetime may be decrease dramatically.

## Revision History

Current version: **2016/06/05**

Previous version: **N/A**

Device No. DHE-0003094

Rev. Ver. 1

Page	Subjects (major change in previous version)	Date of change